




# Toshiba Encore WT8-A Tablet Camera Replacement

This guide is intended to show tablet owners how they can take their device apart in order to replace the camera.

Written By: Melanie Mestre

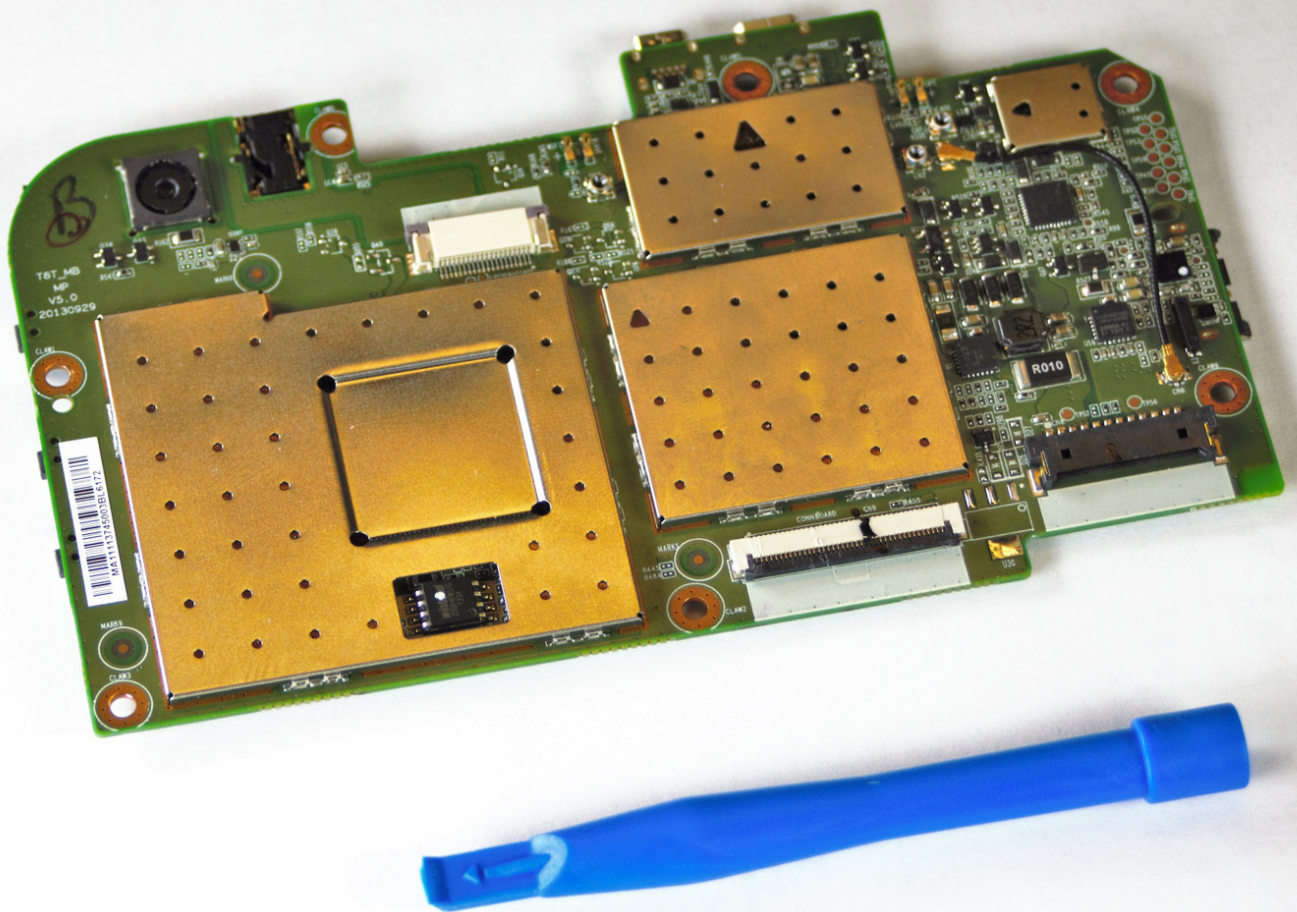




## TOOLS:


- [Metal Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Tweezers](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Motherboard

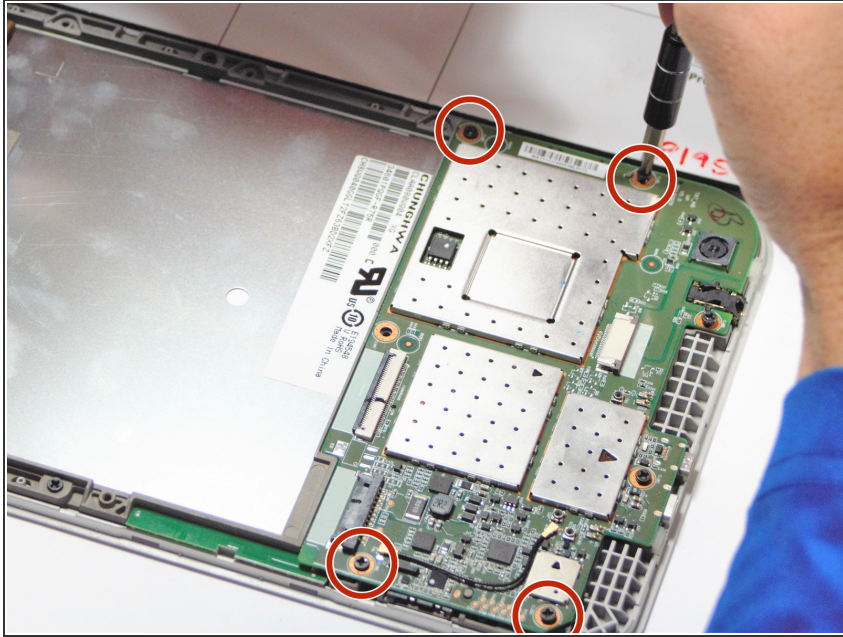

- Remove the 4 – 4.5 mm screws from the motherboard assembly.

## Step 2

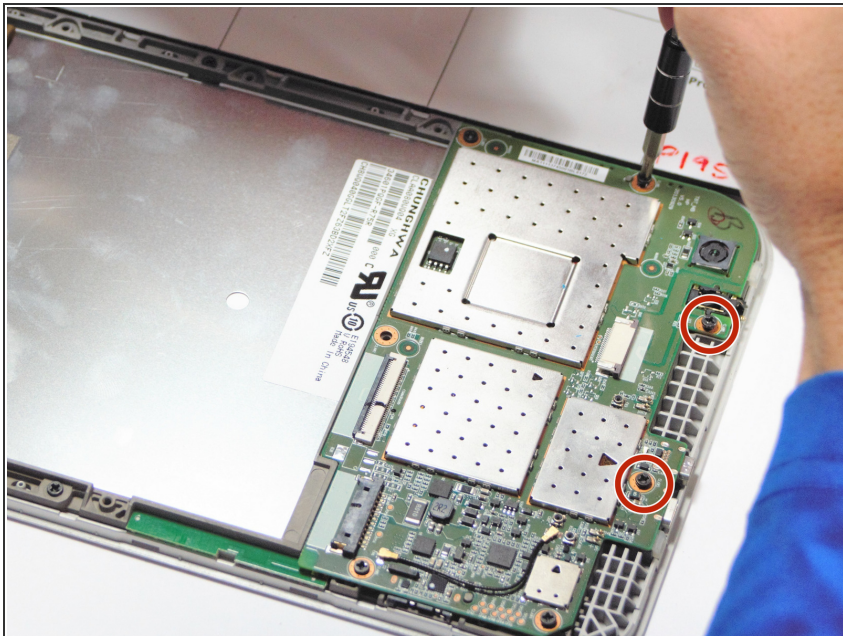

- Remove the 2 – 3.5 mm screws from the motherboard assembly.




## Step 3





- The motherboard should come free at this point.

## Step 4 — Camera

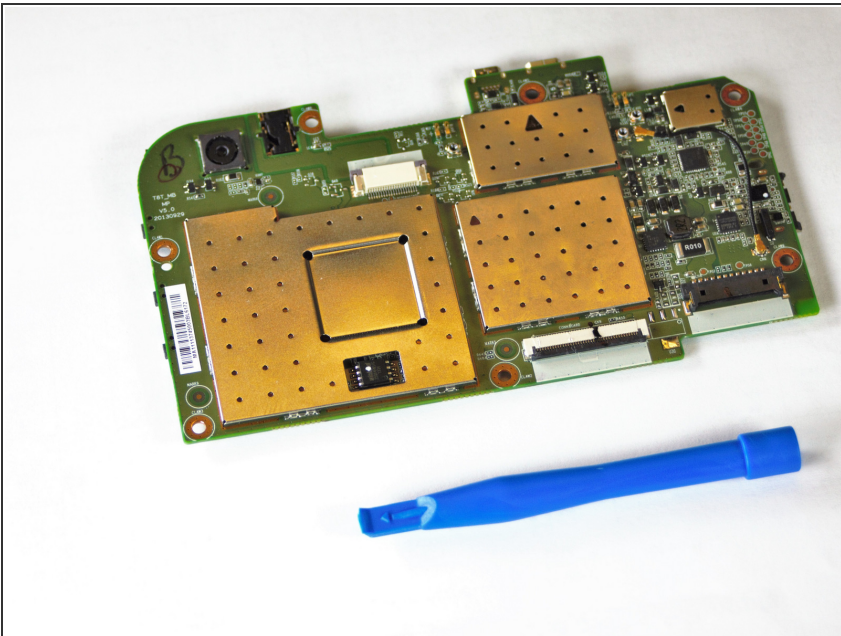


- Use small plastic opening tool for the following steps.

## Step 5

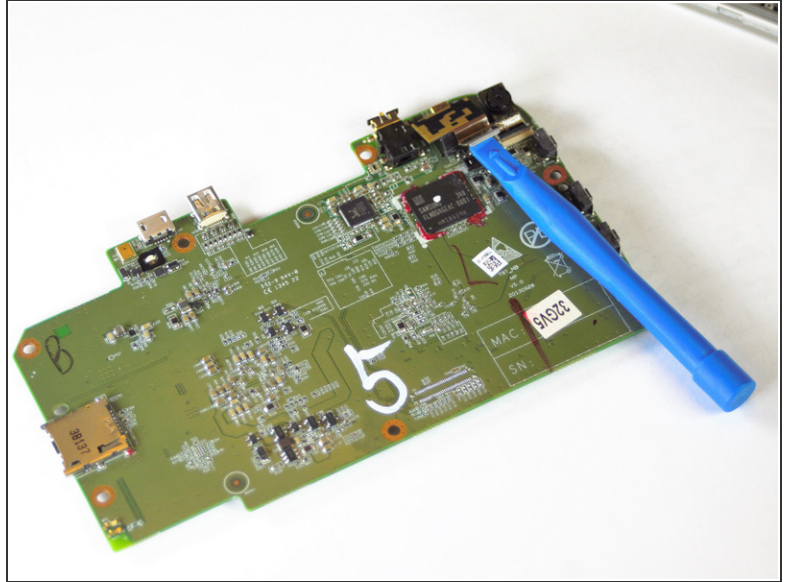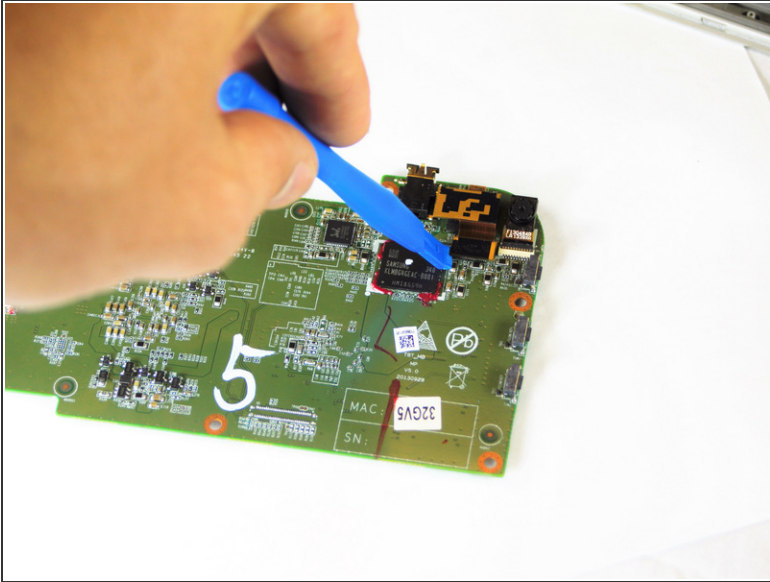

- Use small plastic opening tool to pry rear facing camera flat top connector from motherboard.


## Step 6

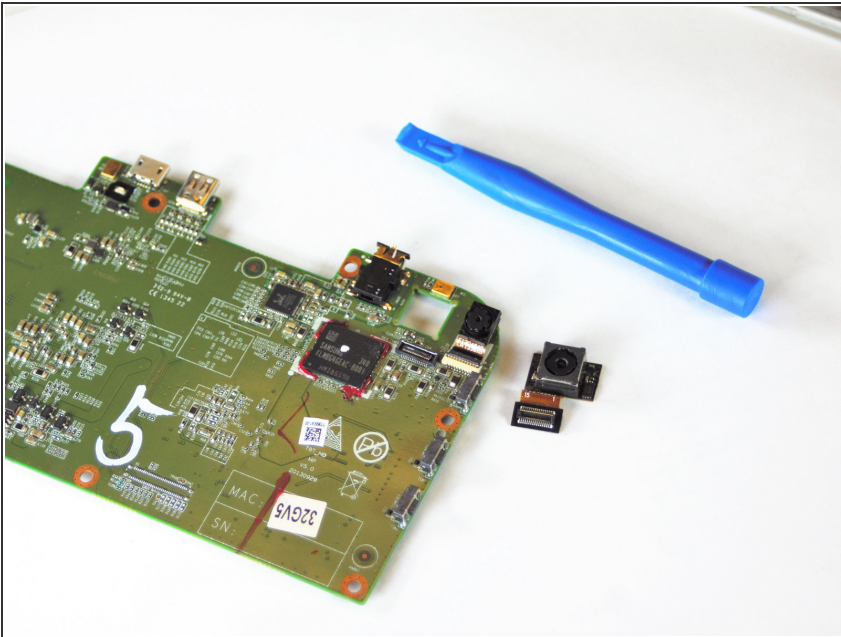

- The rear facing camera should come free at this point.





## Step 7

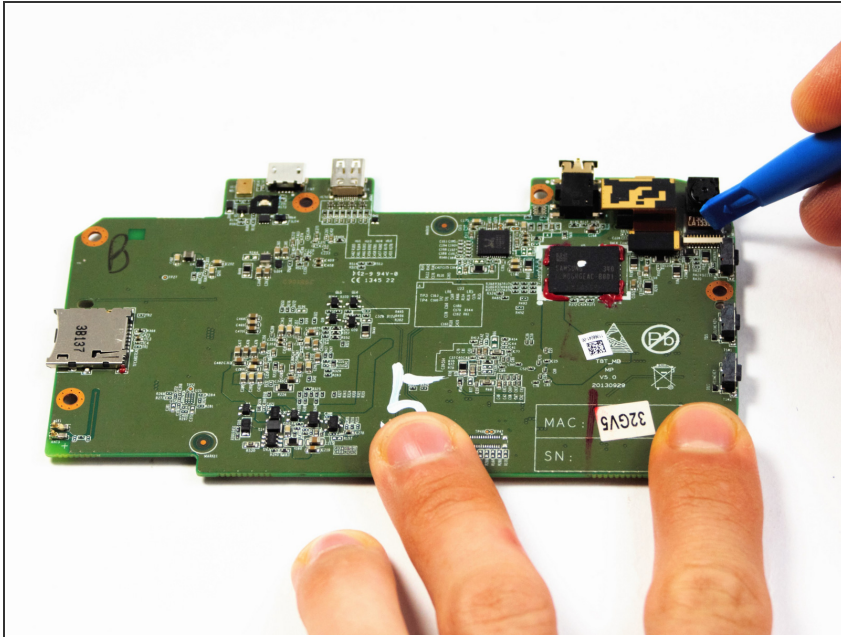

- Use small plastic opening tool to pry front facing camera flat top connector from the motherboard

## Step 8

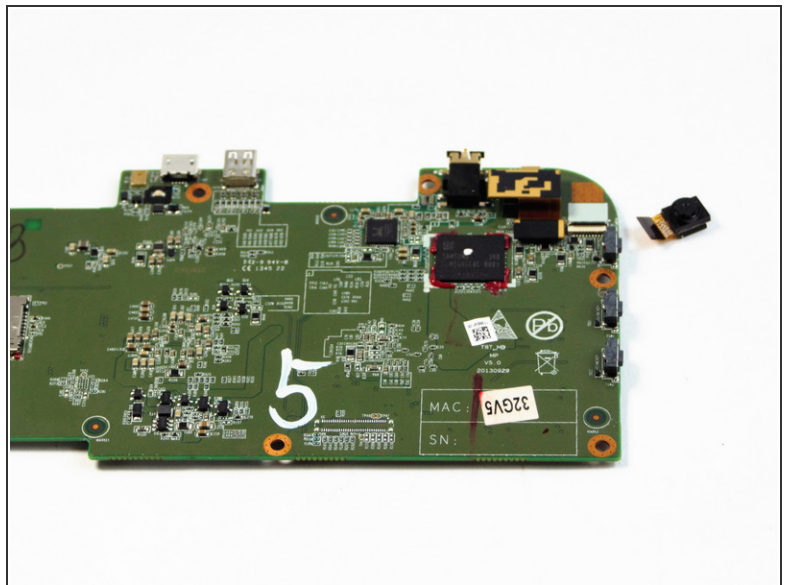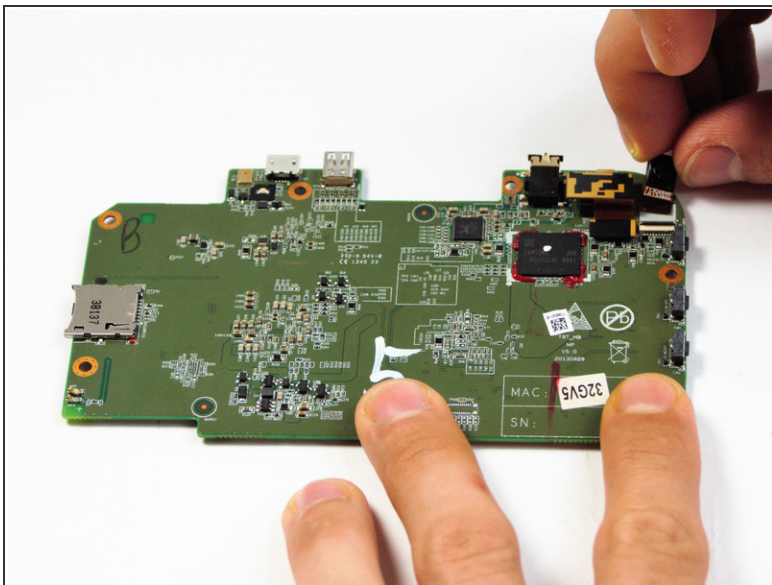

- The front facing camera should come free at this point.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-10 09:12:34 PM.

